



**STEAB**  
Via Ugo Corti, 18 - 50141 FIRENZE - ITALIA - Tel. 055-419988 r.a. - Fax. 055-419988 - www.steab.it

# ALLEGATO TECNICO Technical data sheet

Codice documento:  
SC-ALLT Rev.0

Rif./des.


**JUNCTION DEVICE Paguro®** Code: 5663/////221

**A2**

**MATERIAL OF THE CONTAINER:** Plastic Nylon PA66 with 25% glass' fiber additive, self estinguish V0, UV resistant;  
**INSULATION'S MATERIAL:** Sylliconic GEL "ISOGEL RR/ST" **COLOUR:** Black

**Technical details:** DEGREE OF PROTECTION: IP68 (at 1.3 mt. depth in the ground or water)  
Ways: 3 Poles: 3 Connection: Main Line: 3 x 6mm<sup>2</sup> Derivation: 3 x 2.5mm<sup>2</sup>  
External diameter of admitted cables: Main Line: 7.5 mm minimum – 16 mm maximum  
Derivation: 6.5 mm minimum – 12 mm maximum  
The Junction Device is supplied with STRAIN RELIEF

**Certification:** in progress against EU Standards EN-60998 through Intertek SEMKO (Official Testing Institute in Sweden) valid all over Europe. In the meantime, we can release our Declaration of Conformity to the above Technical Details

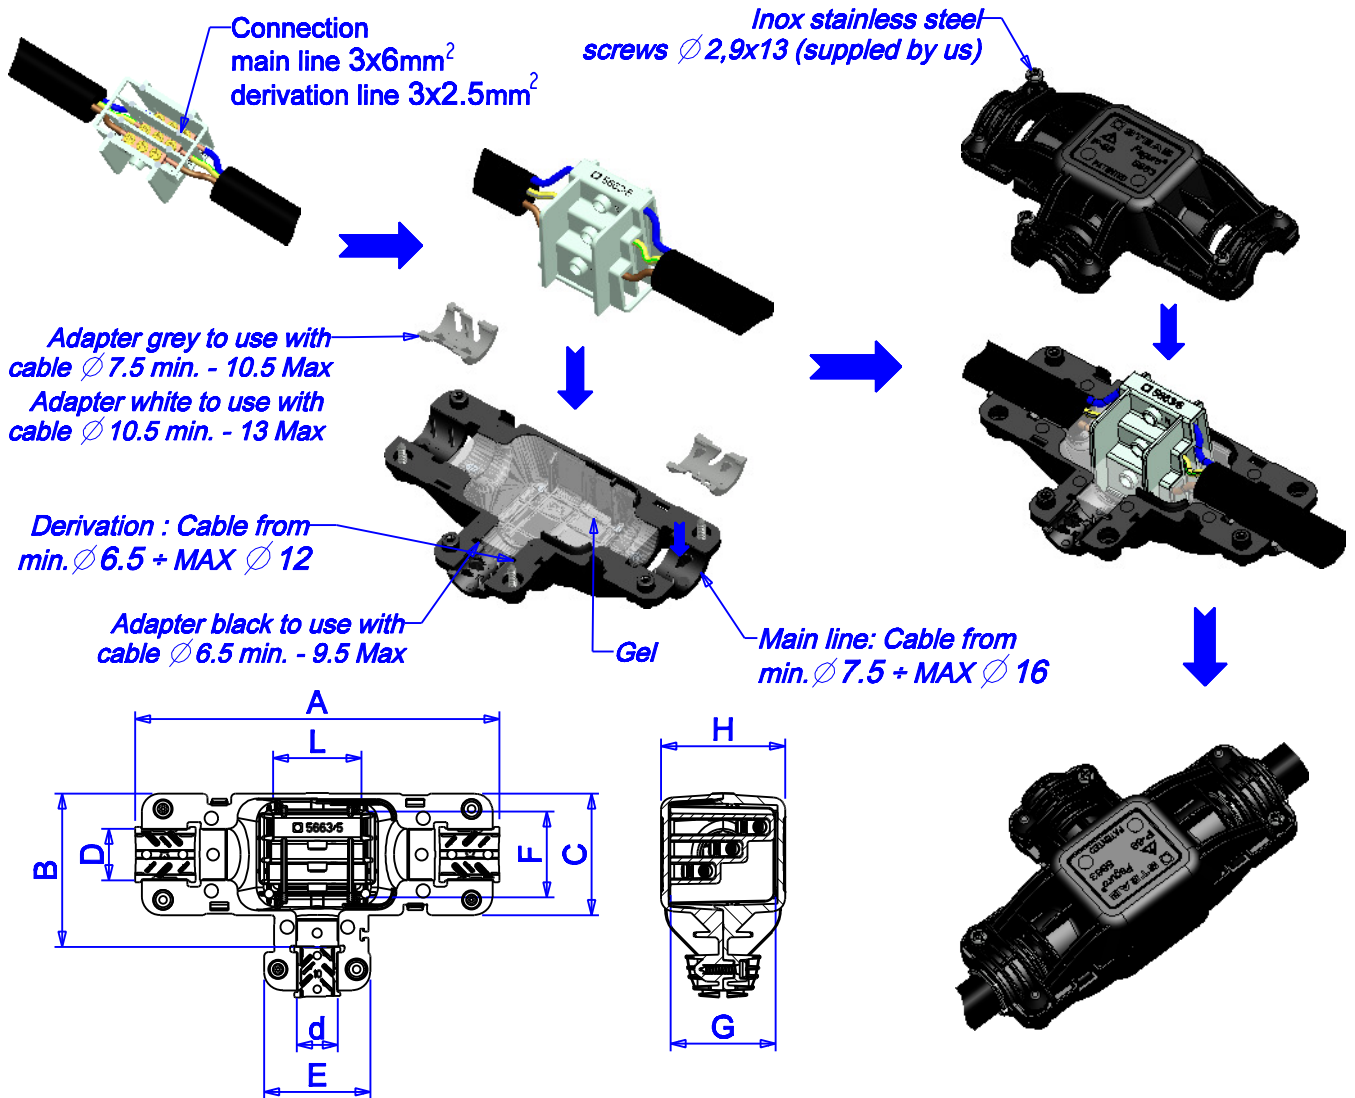

**LxFxG Max volume interno disponibile**  
**LxFxG Max internal room available**

**Cable's dismantling specs**

Code	Dimensions (mm)									
	A	B	C	D	d	E	F	G	H	L
5663	116	65	40	16	12	35	25	35	41	40

